

1030321

hot street - dirt track

Alfa Romeo 673.01 Alfa 75,90,GTV6
V-6cyl 2.5L 12v SOHC (DT/FT)




intake **exhaust**

camshaft data:

lash ramp	: 0.20mm	0.30mm
duration @ 0.1mm	: 282°	296°
duration @ 1.0mm	: 244°	240°
valve lift	: 11.50mm	10.15mm
cam lift	:	7.25mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 14° / 50°	48° / 12°
valve lift @ TDC	: 2.95mm	2.50mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E95009	: PAC-E95009
interior spring	: PAC-I95009	: PAC-I95009
fitted load / length	: 36kg @ 34.0mm	: 36kg @ 34.0mm
max. load / lift	: 101kg @ 12.0mm	: 101kg @ 12.0mm

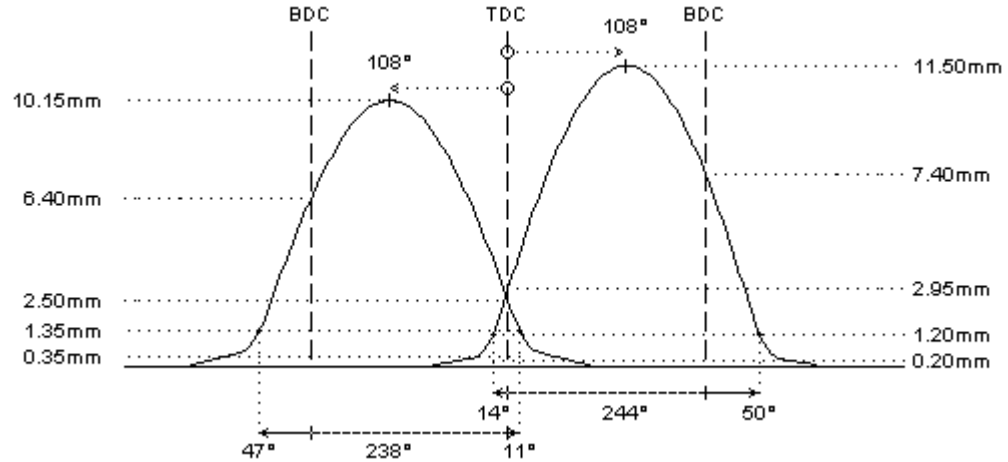

REMARKS :

- # GTV: all data are measured on the valve and assume fixed rocker ratio of 1.4 on exhaust
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors
- # use centering shim only: remove the flat adjustment shim

REMARKS :