

# 1300658

hot street - dirt track

Bmw S14 (23 4 EA) 195hp

I-4cyl 2.3L 16v DOHC (DTs/DTs)



**intake**                      **exhaust**

**camshaft data:**


lash ramp	: 0.30mm	0.25mm
duration @ 0.1mm	: 279°	278°
duration @ 1.0mm	: 243°	238°
valve lift	: 12.00mm	11.45mm
cam lift	: 12.00mm	11.45mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 14° / 49°	47° / 11°
valve lift @ TDC	: 3.05mm	2.60mm

**parts setup:**

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

**REMARKS :**

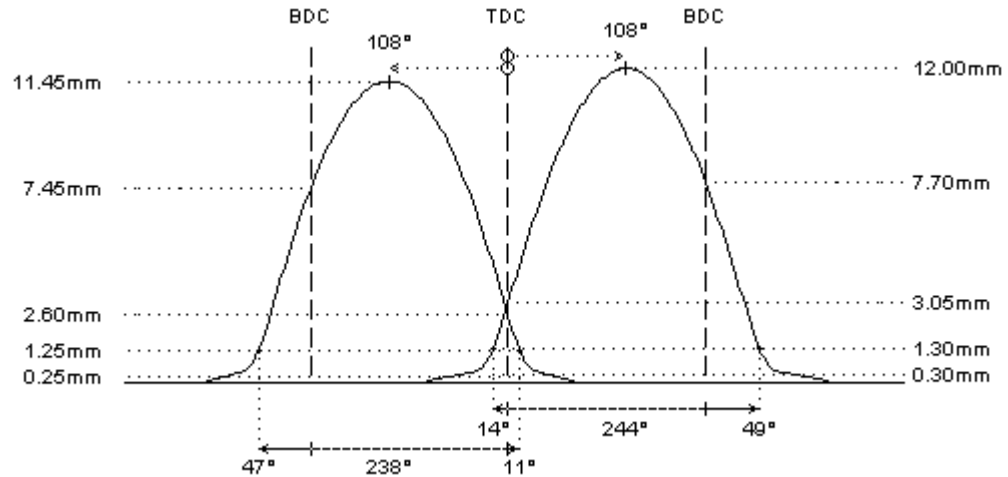

**REMARKS :**

- # These camshafts can be used in following engines (different valves are used, please contact Cat Cams in case of doubt):
  - S14 (23 4 EA), 2302cc, 195hp
  - S14 (23 4 S2), 2302cc, 215hp
  - S14 (25 4 S1), 2467cc, 238hp
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors