

1301004

hot street - dirt track

Bmw S38 B39

I-6cyl 3.8L 24v DOHC (DTs/DTs)



intake **exhaust**

camshaft data:


lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 291°	291°
duration @ 1.0mm	: 254°	254°
valve lift	: 10.75mm	10.75mm
cam lift	: 10.75mm	10.75mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 17° / 57°	57° / 17°
valve lift @ TDC	: 3.05mm	3.05mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.

fitted load / length	: 33kg @ 35.5mm	: 33kg @ 35.5mm
max. load / lift	: 92kg @ 12.0mm	: 92kg @ 12.0mm

REMARKS :

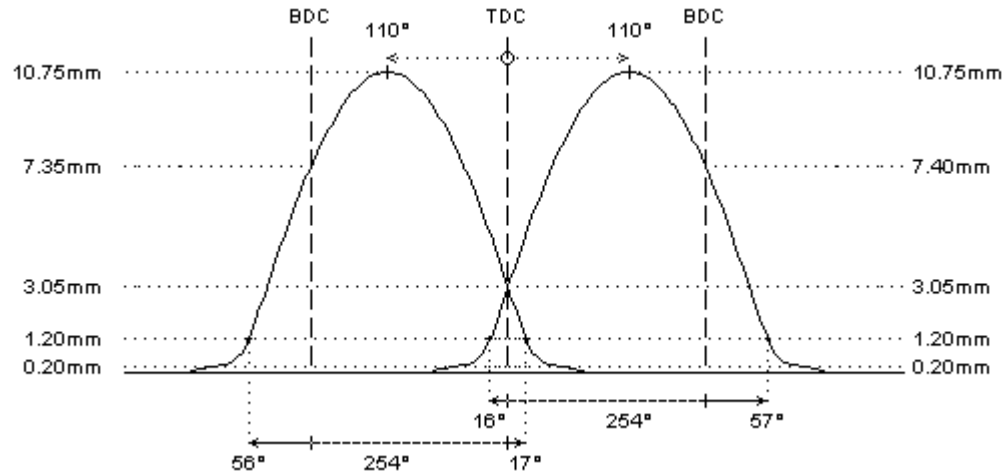

REMARKS :

- # these camshafts can also be used in M88 (3.4L) and S38B36 (3.6L) engines
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors