

1303508

hot street - dirt track

Bmw M60 B40 286hp

V-8cyl 4.0L 32v DOHC (DTH/DTH)



intake

exhaust

camshaft data:


lash ramp	: hydro	hydro
duration @ 0.1mm	: 283°	274°
duration @ 1.0mm	: 242°	233°
valve lift	: 11.55mm	11.00mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 16° / 46°	41° / 12°
valve lift @ TDC	: 3.05mm	2.45mm

parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	PAC-I92009	PAC-I92009

fitted load / length	: 40kg @ 36.8mm	: 40kg @ 36.8mm
max. load / lift	: 94kg @ 11.0mm	: 94kg @ 11.0mm

REMARKS :

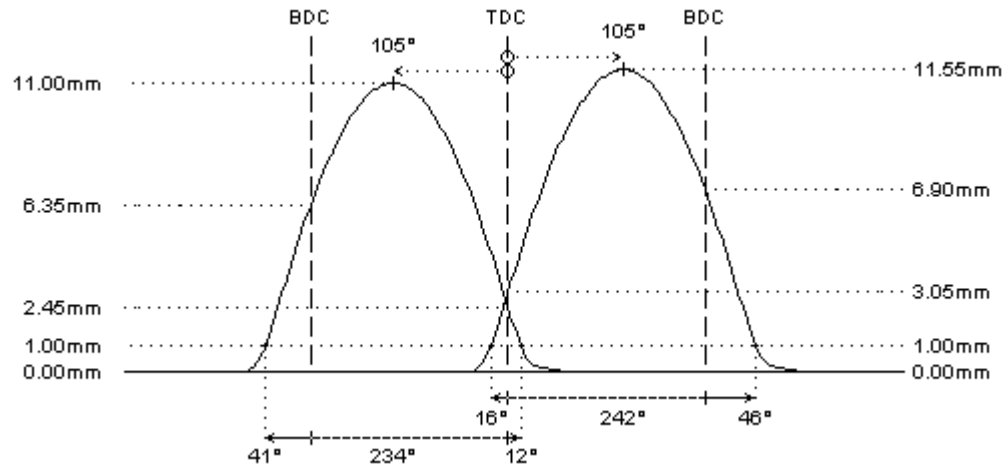

REMARKS :

- # These camshafts can also be used in M60 B30 (V8 3.0L 32v) engine
- # valve spring setup:
 - replace std interior spring by PAC-I95009
 - remove lower shim of exterior spring to increase max. allowed lift to 11.5mm
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors