

1321856

full race

Citroën TU5J4 120hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



intake

exhaust

camshaft data:

lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 297°	297°
duration @ 1.0mm	: 266°	266°
valve lift	: 12.55mm	12.55mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 28° / 58°	58° / 28°
valve lift @ TDC	: 4.50mm	4.45mm

parts setup:

cam wheels :	:	:
follower	: CC018	: CC018
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99311/s	: 99311/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:


fitted load / length	: 33kg @ 36.8mm	: 33kg @ 36.8mm
max. load / lift	: 82kg @ 12.5mm	: 82kg @ 12.5mm

REMARKS :

Double springs PAC-D99862 or PAC-D19862 (gold) can also be used #
with retainer 99311/S (machining around the valve guide is required).
See valve setup section for fitting details. Recommended for
applications above 8.500rpm

Inlet Valves:
 9249007 d6.00 // D28.8 // L104.6

Exhaust Valves:

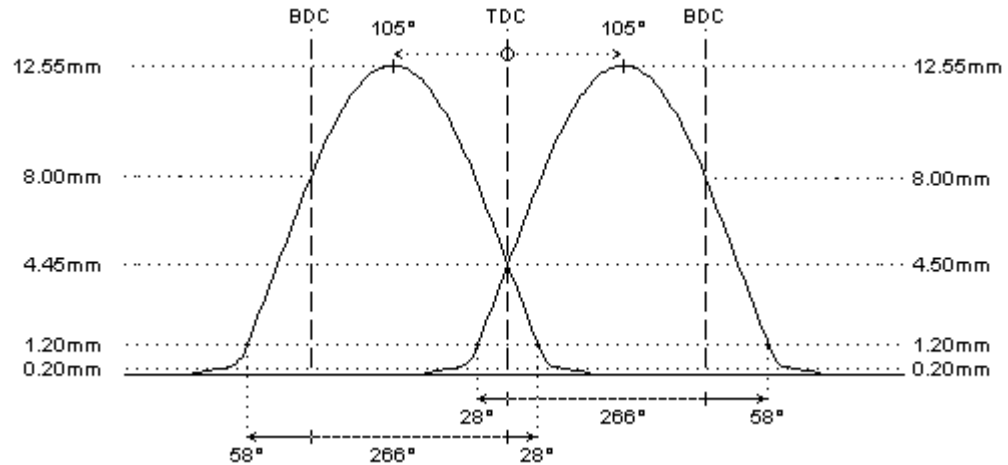

REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # valve clearance is to be adjusted using mechanical lash caps. these can have different shapes according the application:
 - plates available in different diameters and thickness
 - cups for different valve stem diameters. these center on either tappet or valve stem
 - other specific shapes available on request
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors

#

🔍 9249006 d6.00 // D26.0 // L104.2 Oversize

#

🔍 9249016 d6.00 // D24.5 // L104.2