

1900643

sport

Fiat A112 2.000

I-4cyl 1.0L 8v OHV (FT/FT)




	intake	exhaust
camshaft data:		
lash ramp	: 0.35mm	0.35mm
duration @ 0.1mm	: 280°	280°
duration @ 1.0mm	: 230°	230°
valve lift	: 9.80mm	9.80mm
cam lift	: 7.05mm	7.05mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 7° / 43°	43° / 7°
valve lift @ TDC	: 2.05mm	2.05mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 25kg @ 37.3mm	: 25kg @ 37.3mm
max. load / lift	: 66kg @ 10.0mm	: 66kg @ 10.0mm

REMARKS :

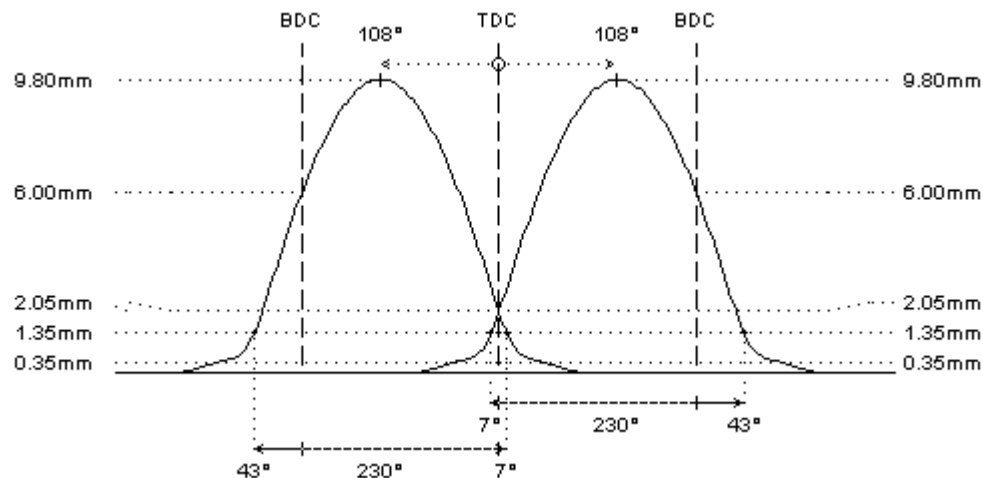

REMARKS :

- # - bearing diameters: 38.00 - 43.35 - 31.00mm
- indicate when cam core must be undercut for connection rod clearance (Abarth)