

4603022

tarmac rally - race

Opel X20XEV big block ecotec (1.8-2.0-2.2L)

I-4cyl 2.0L 16v DOHC (DTH/DTH)



intake

exhaust

camshaft data:

lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 298°	290°
duration @ 1.0mm	: 260°	252°
valve lift	: 12.50mm	12.00mm
cam lift	:	
lobe angle	: 104°	104°
timing @ 1.0mm	: 26° / 54°	50° / 22°
valve lift @ TDC	: 4.55mm	4.00mm


parts setup:

cam wheels :	: CTOPK01	: CTOPK01
follower	: CC004	: CC004
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99145/s	: 99145/s
lower retainer	: remove	: remove
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009

fitted load / length	: 35kg @ 33.0mm	: 35kg @ 33.0mm
max. load / lift	: 97kg @ 12.5mm	: 97kg @ 12.5mm

REMARKS :

replace OEM lower retainer to obtain a correct installation / fitted length (currently not available)

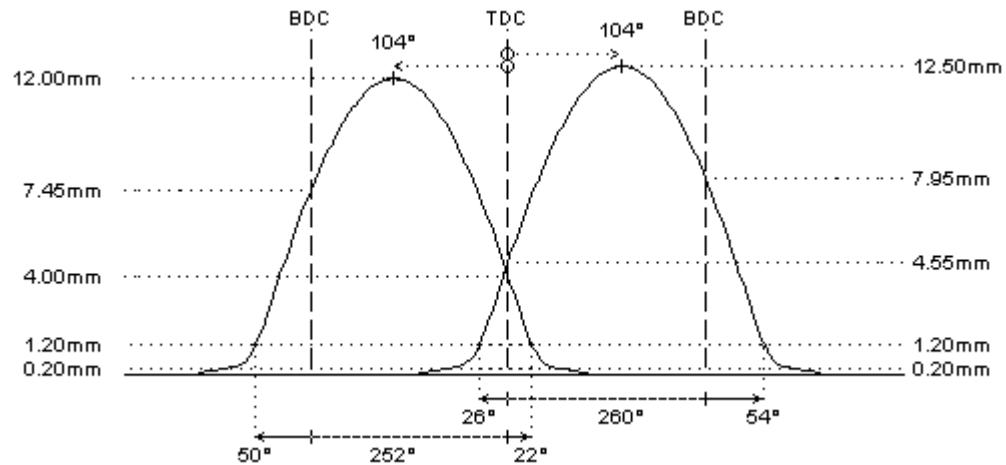

REMARKS :

- # - camshafts for use in 1.8-2.0-2.2L long block 'ecotec' engines
- # valve clearance is to be adjusted using mechanical lash caps. these can have different shapes according the application:
 - plates available in different diameters and thickness
 - cups for different valve stem diameters. these center on either tappet or valve stem
 - other specific shapes available on request
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors