

# 5200112

tarmac rally - race

Porsche general info

B-6cyl 12v SOHC (RP/RP)




**intake**                      **exhaust**

**camshaft data:**

lash ramp	: 0.25mm	0.30mm
duration @ 0.1mm	: 315°	307°
duration @ 1.0mm	: 272°	272°
valve lift	: 12.65mm	12.50mm
cam lift	: 8.75mm	8.75mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 28° / 64°	63° / 29°
valve lift @ TDC	: 4.80mm	4.85mm

**parts setup:**

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-E99859	:  PAC-E99859
interior spring	:  PAC-I95009	:  PAC-I95009
fitted load / length	: 40kg @ 34.5mm	: 40kg @ 34.5mm
max. load / lift	: 108kg @ 13.0mm	: 108kg @ 13.0mm

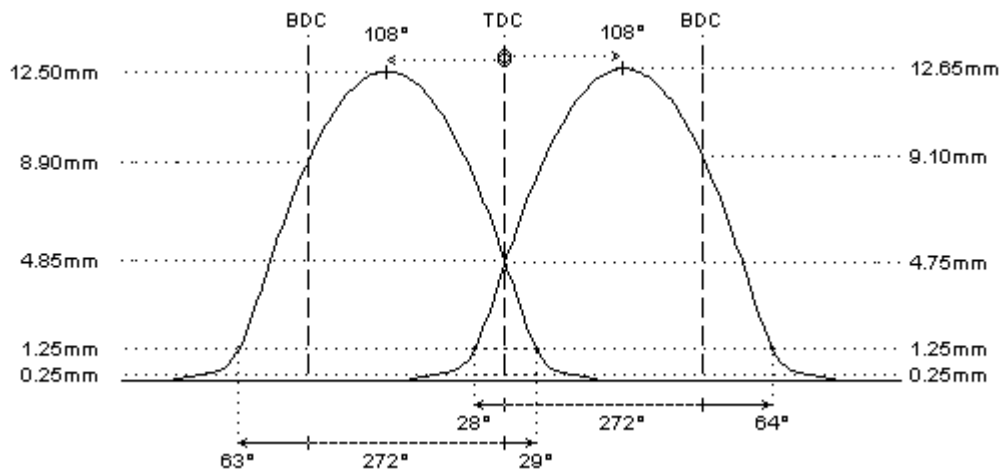

**REMARKS :**

- # - the list contains a selection of the available profiles. Special attention is required due to many evolutions to the 911 engine
- please read the remarks about the different camshaft executions
- when ordering, please indicate: engine code, OEM camshaft number, bearing type, cam nose type, auxiliary drive type

**REMARKS :**

# valve spring kit can be developed on request #  
in most engines, the Catcams springs can replace the original double valve spring (901 10590150) on the original spring retainers (901 10542103 + 901 10546300)