

# 5500634


hot street - dirt track

Renault J6, J7

I-4cyl 2.0L 8v SOHC (RP/RP)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 291°	291°
duration @ 1.0mm	: 251°	251°
valve lift	: 11.65mm	11.65mm
cam lift	: 7.60mm	7.60mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 56°	56° / 15°
valve lift @ TDC	: 2.95mm	2.95mm
<b>parts setup:</b>		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	PAC-S99843	PAC-S99843
interior spring :		
fitted load / length :	39kg @ 36.5mm	39kg @ 36.5mm
max. load / lift :	95kg @ 13.0mm	95kg @ 13.0mm

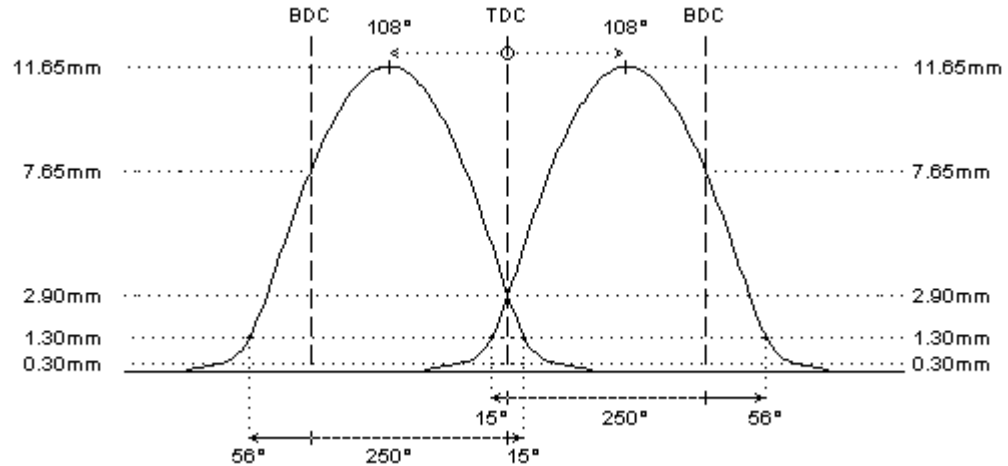

### REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafs must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburettors

### REMARKS :

- # check distance between valve seal and retainer to be at least 0.6mm # at full lift
- use additional spacer under lower retainer to obtain correct fitted length (approx. 3mm)