

7107416

full race


Toyota 4A-GE 20v VVT-i
I-4cyl 1.6L 20v DOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 291°	291°
duration @ 1.0mm	: 262°	262°
valve lift	: 11.00mm	11.00mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 25° / 57°	57° / 25°
valve lift @ TDC	: 3.65mm	3.65mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	99367	99367
lower retainer :	O.E.M.	O.E.M.
exterior spring :	PAC-S90013	PAC-S90013
interior spring :		
fitted load / length	: 20kg @ 35.3mm	: 20kg @ 35.3mm
max. load / lift	: 65kg @ 11.5mm	: 65kg @ 11.5mm

REMARKS :

machining of cylinder head required

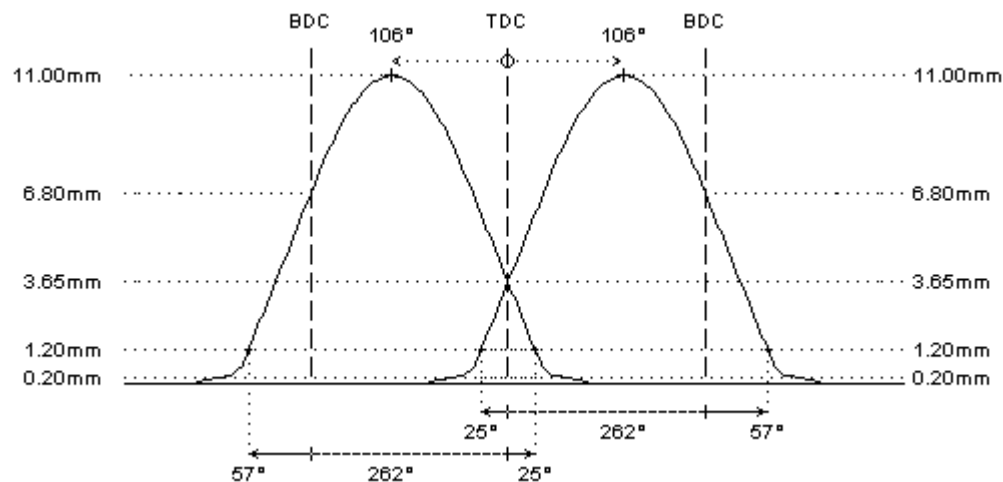

REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # Valve lift and timing data are illustrated on a locked centerline. The VANOS system changes the centerlines and therefore the timing data and lift on TDC.
 - The centerline and TDC data should not be used when installing the camshaft with full cam intake retard (disengaged VANOS system)!!! WRONG INSTALLATION WILL CAUSE THE VALVES TO HIT THE PISTONS!!!
 - We insist to install the VANOS camshaft(s) in such way that the distance between valves and piston is at least 1mm at full advance of the intake (or full retard at the exhaust)
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors