

7606907

hot street - dirt track

Volkswagen AUD,AKK,ANW 60hp

I-4cyl 1.4L 8v SOHC (RPRH/RPRH)



	intake	exhaust
--	--------	---------

camshaft data:


lash ramp	: hydro	hydro
duration @ 0.1mm	: 268°	268°
duration @ 1.0mm	: 229°	229°
valve lift	: 9.95mm	9.95mm
cam lift	: 5.70mm	5.70mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 8° / 41°	44° / 5°
valve lift @ TDC	: 1.75mm	1.50mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 24kg @ 34.5mm	: 24kg @ 34.5mm
max. load / lift	: 64kg @ 10.0mm	: 64kg @ 10.0mm

REMARKS :

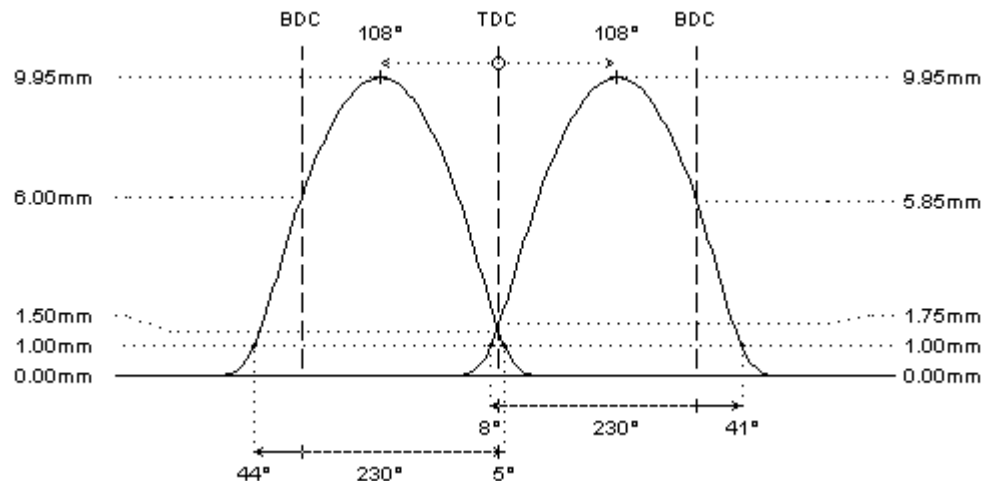

REMARKS :

- # Distance between valve and piston should be 1.0mm at least:
 - check 5-15° after TDC on intake
 - check 5-15° before TDC on exhaustMachine pistons if required. Wrong installation can cause severe engine damage!
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors