

2501664

tarmac rally - race

Honda B16A

I-4cyl 1.6L 16v DOHC (RP/RP)



intake

exhaust

camshaft data:


lash ramp	: 0.20mm	: 0.20mm
duration @ 0.1mm	: 301° (278-278)	: 288° (272-272)
duration @ 1.0mm	: 262° (242-242)	: 252° (233-233)
valve lift	: 11.95mm (10.75-10.75)	: 11.80mm (10.55-10.55)
cam lift	: 7.50mm (7.00-7.00)	: 7.40mm (6.90-6.90)
lobe angle	: 106° (106-106)	: 106° (106-106)
timing @ 1.0mm	: 25° / 57°	: 52° / 20°
valve lift @ TDC	: 4.20mm (2.85-2.85)	: 3.60mm (2.20-2.20)

parts setup:

cam wheels :	: CTHO110	: CTHO110
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99375/s	: 99375/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99861	: PAC-E99861
interior spring	: PAC-I99861	: PAC-I99861

fitted load / length	: 30kg @ 0.0mm	: 28kg @ 0.0mm
max. load / lift	: 97kg @ 12.0mm	: 95kg @ 12.0mm

REMARKS :

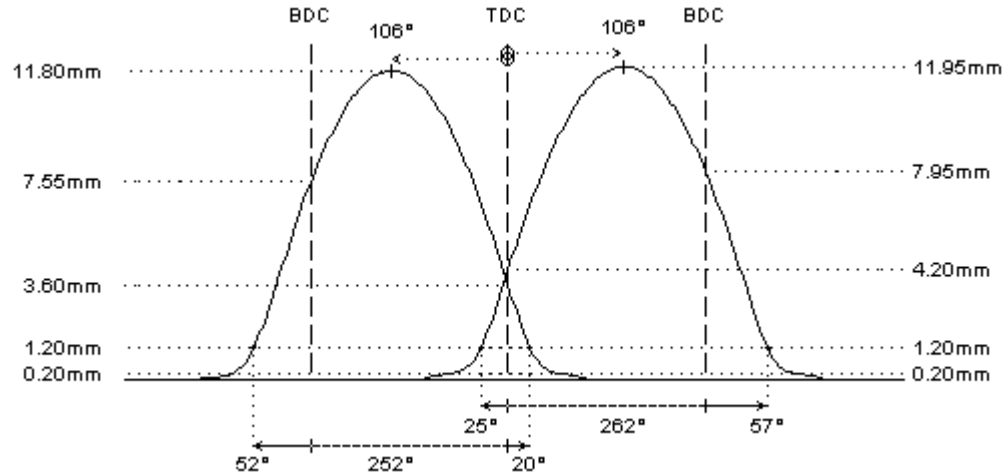

REMARKS :