

7107502

sport

Toyota 3S-GE 4th gen, VVT in
I-4cyl 2.0L 16v DOHC (DTx/DTx)



intake **exhaust**

camshaft data:

lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 270°	264°
duration @ 1.0mm	: 236°	228°
valve lift	: 11.50mm	11.05mm
cam lift	: 11.50mm	11.05mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 8° / 48°	44° / 4°
valve lift @ TDC	: 2.20mm	1.65mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available #
check std valve spring setup for coil bind length and use valve spring #
kit if required
valve spring kit can be developed on request

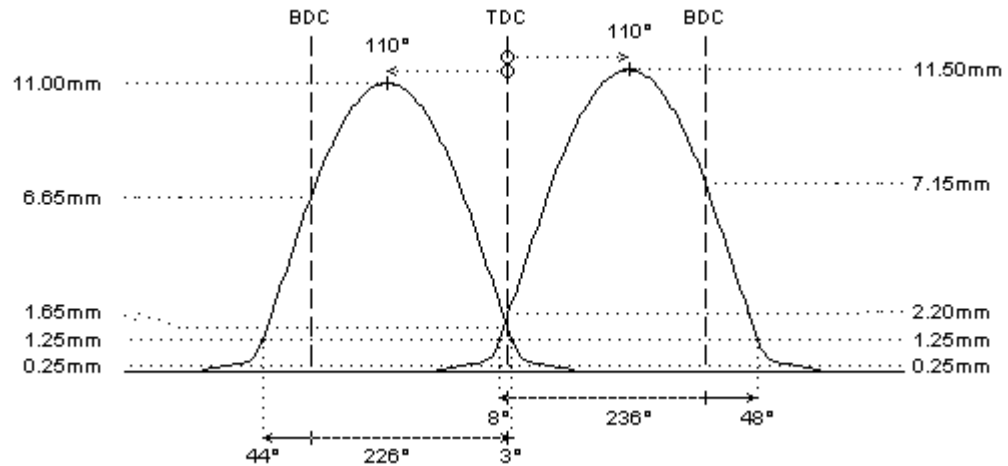

REMARKS :