

1300657

sport

Bmw S14 (23 4 EA) 195hp

I-4cyl 2.3L 16v DOHC (DTs/DTs)



intake **exhaust**

camshaft data:


lash ramp	: 0.25mm	0.30mm
duration @ 0.1mm	: 278°	275°
duration @ 1.0mm	: 238°	237°
valve lift	: 11.45mm	10.95mm
cam lift	: 11.45mm	10.95mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 11° / 47°	47° / 10°
valve lift @ TDC	: 2.70mm	2.45mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

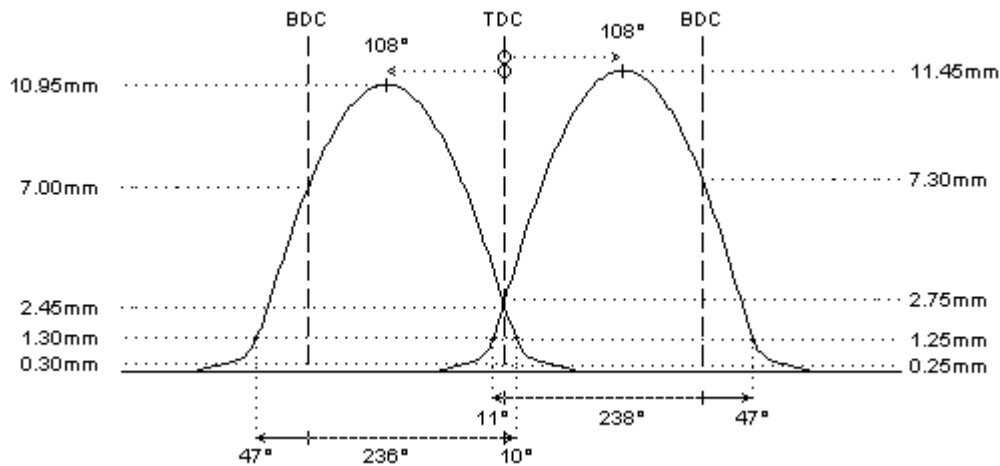

REMARKS :

- # These camshafts can be used in following engines (different valves are used, please contact Cat Cams in case of doubt):
 - S14 (23 4 EA), 2302cc, 195hp
 - S14 (23 4 S2), 2302cc, 215hp
 - S14 (25 4 S1), 2467cc, 238hp