

2290108

tarmac rally - race

Ford Zeta 1.8 - 2.0L, hydro (silvertop)

I-4cyl 2.0L 16v DOHC (DTH/DTH)



intake **exhaust**

camshaft data:


lash ramp	: hydro	hydro
duration @ 0.1mm	: 274°	266°
duration @ 1.0mm	: 246°	238°
valve lift	: 10.90mm	10.45mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: 13° / 53°	49° / 9°
valve lift @ TDC	: 2.50mm	2.05mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:

fitted load / length	: 33kg @ 37.0mm	: 33kg @ 37.0mm
max. load / lift	: 79kg @ 12.0mm	: 79kg @ 12.0mm

REMARKS :

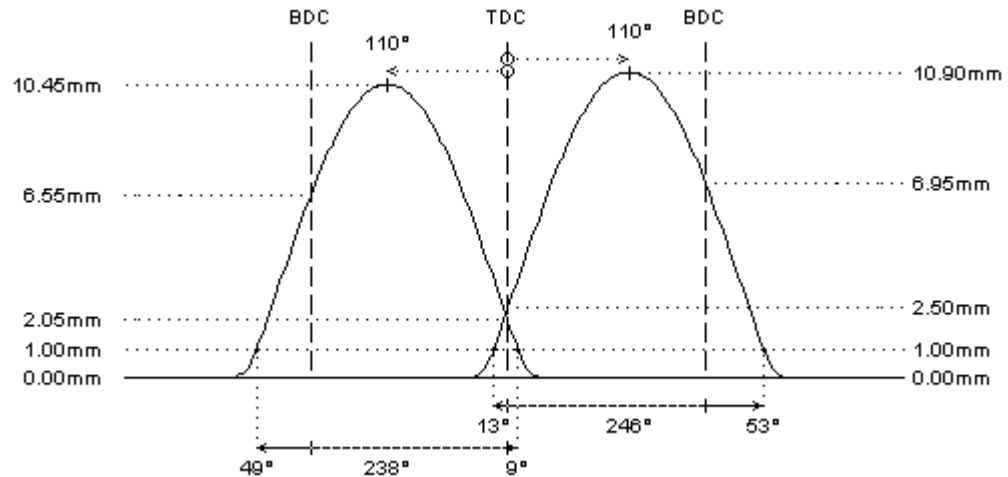

REMARKS :

- # for 1st generation engines with hydraulic tappets, single groove valves and cylindrical valve springs (until '97)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors