

2291102

sport

Ford ZH12 Sigma

I-4cyl 1.2L 16v DOHC (DTs/DTs)



intake **exhaust**

camshaft data:


lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 233°	233°
duration @ 1.0mm	: 199°	199°
valve lift	: 7.25mm	7.25mm
cam lift	: 7.25mm	7.25mm
lobe angle	: 108°	102°
timing @ 1.0mm	: -9° / 28°	21° / -2°
valve lift @ TDC	: 0.60mm	1.10mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 22kg @ 36.0mm	: 22kg @ 36.0mm
max. load / lift	: 39kg @ 11.5mm	: 39kg @ 11.5mm

REMARKS :

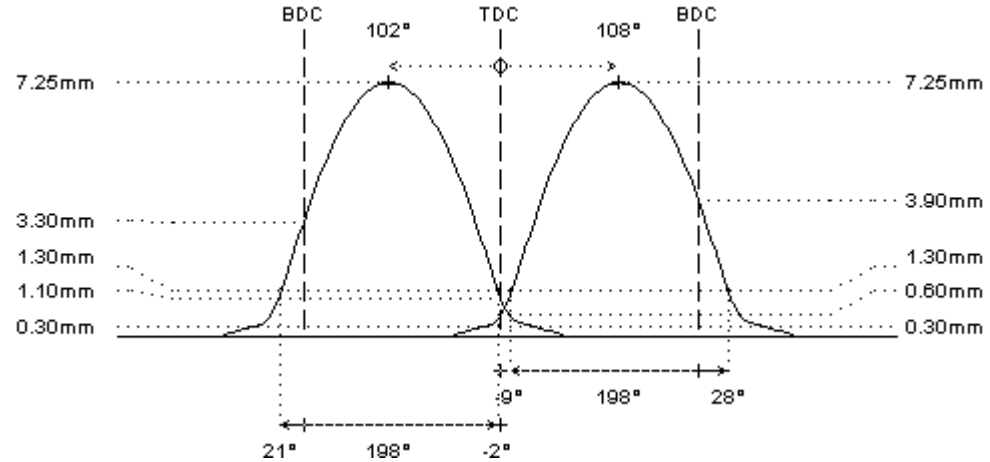

REMARKS :

for engines with 28mm cam followers / 25mm lash adjustment shims (between cam and follower), please contact Cat Cams if different