

2501618

hot street - dirt track

Honda B16A

I-4cyl 1.6L 16v DOHC (RP/RP)



intake

exhaust

camshaft data:


lash ramp	: 0.20mm	: 0.20mm
duration @ 0.1mm	: 288° (248-248)	: 280° (229-229)
duration @ 1.0mm	: 252° (211-211)	: 242° (194-194)
valve lift	: 11.80mm (9.45-9.45)	: 10.80mm (8.15-8.15)
cam lift	: 7.40mm (6.20-6.20)	: 6.90mm (5.40-5.40)
lobe angle	: 106° (106-106)	: 106° (106-106)
timing @ 1.0mm	: 20° / 52°	: 47° / 15°
valve lift @ TDC	: 3.60mm (1.20-1.20)	: 2.80mm (0.65-0.65)

parts setup:

cam wheels :	: CTHO110	: CTHO110
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99375/s	: 99375/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99861	: PAC-E99861
interior spring	: PAC-I99861	: PAC-I99861

fitted load / length	: 30kg @ 0.0mm	: 28kg @ 0.0mm
max. load / lift	: 97kg @ 12.0mm	: 95kg @ 12.0mm

REMARKS :

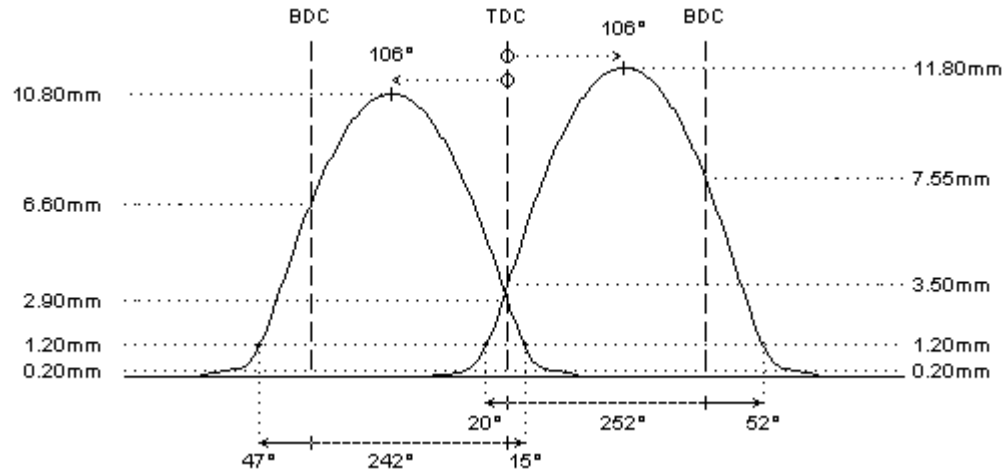

REMARKS :