

4600235

sport

Opel CIH (1.6 > 2.4L)

I-4cyl 2.0L 8v SOHC (FTH/FTH)



intake

exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 263°	263°
duration @ 1.0mm	: 223°	223°
valve lift	: 10.90mm	10.90mm
cam lift	: 7.25mm	7.25mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 1° / 42°	41° / 2°
valve lift @ TDC	: 1.15mm	1.20mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

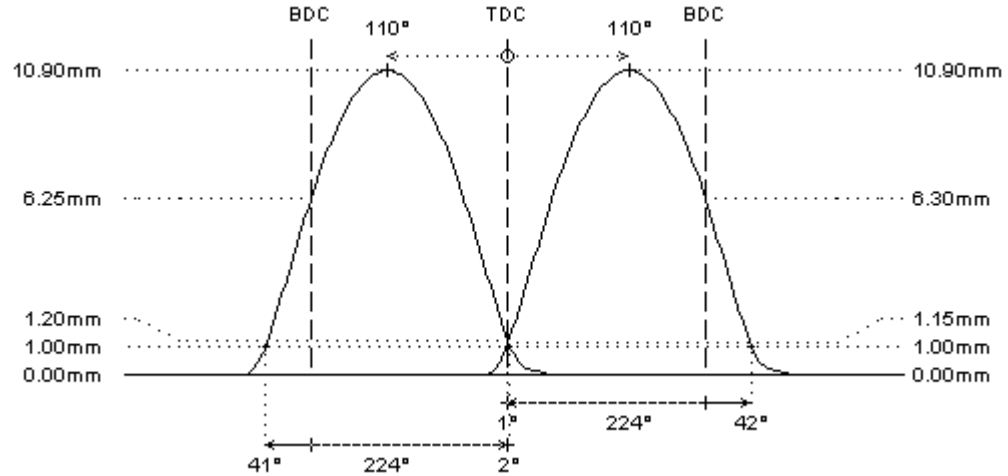

REMARKS :

- chilled cast iron camshafts

Valve lift and timing specifications assume fixed rocker arm ratio of RR1,500. This can be obtained by replacing the O.E.M. rocker arms by the Catcams Roller rocker arms.