

4901805

hot street - dirt track

Citroën EW10J4S 180hp

I-4cyl 2.0L 16v DOHC (DTH/DTH)



intake **exhaust**

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 260°	260°
duration @ 1.0mm	: 232°	232°
valve lift	: 11.00mm	11.00mm
cam lift	:	
lobe angle	: 110°	104°
timing @ 1.0mm	: 6° / 46°	40° / 12°
valve lift @ TDC	: 1.75mm	2.45mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99410/s	: 99410/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:

fitted load / length	: 30kg @ 38.0mm	: 30kg @ 38.0mm
max. load / lift	: 79kg @ 13.0mm	: 79kg @ 13.0mm

REMARKS :

#		#
Inlet Valves:		#
9249003 d6.00 // D35.0 // L106.1		#
Exhaust Valves:		#
9249004 d6.00 // D31.0 // L102.9		

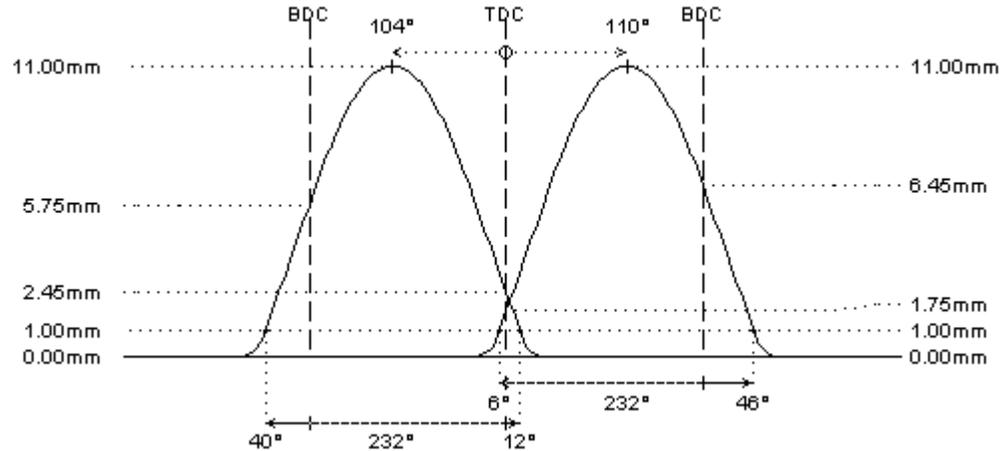

REMARKS :

- # The original VVT system can be fitted on these camshafts. However, we strongly suggest to limit or disable the VVT system (see remarks).
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # Valve lift and timing data are illustrated on a locked centerline. The VANOS system changes the centerlines and therefore the timing data and lift on TDC.
 - The centerline and TDC data should not be used when installing the camshaft with full cam intake retard (disengaged VANOS system)!!! WRONG INSTALLATION WILL CAUSE THE VALVES TO HIT THE PISTONS!!!
 - We insist to install the VANOS camshaft(s) in such way that the distance between valves and piston is at least 1mm at full advance of the intake (or full retard at the exhaust)
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburettors